



VSF
SERIES



Worm Geared Motors

NMRV[®] **NMRV**[™]
POWER



www.mak.nl

P.O. box 462
8200 AL Lelystad
The Netherlands
T +31 (0)320 - 266966
E info@mak.nl



MOTOVARIO[®]
HEART OF MOTION
a **TECO** Group company

FEATURES



NMRV and NMRVpower worm gear reducers currently re-present the most advanced solution to market requirements in terms of **efficiency** and **flexibility**. The new NMRVpower series, also available as compact integral helical/worm option, has been designed to guarantee a **high modularity**. Low number of basic models can be applied to a **wide range of power ratings** guaranteeing high performance.

NMRV[®]

SIZES:

025-030-040-050-130-150



NMRV

Fitted for motor coupling



NMRV-P

Fitted for motor coupling



SIZES:

063-075-090-110

- Cases up to 110 in die-cast aluminium alloy and over 130 in G200 grey cast iron
- Aluminium units are supplied complete with synthetic oil and allow for universal mounting positions, with no need to modify lubricant quantity
- Worm wheel: bronze Cu Sn12 Ni2 (UNI7013-10)
- Ground worm profile ZI (UNI4760)
- Excellent mechanical strength and particularly lightweight
- Loading capacity in accordance with: ISO.14521, DIN.3996, BS 721, AGMA 6034, ISO 6336, DIN 3990, DIN 743, ISO 281
- Size 030 and over are painted with RAL 5010 blue epoxy-polyester powder
- Available with pre-stage unit: PC for NMRV Series, HW for NMRV-P Series
- Worm gear reducers are available with different combinations: NMRV/NMRV, NMRV/NMRV-P, NMRV-P/NMRV-P and NMRV-P/NMRV
- ATEX versions available: 3GD/2GD

OTHER VERSIONS



NRV

With Input Shaft



NRV-P

With Input Shaft



NMRV/NMRV-P

Combined Worm Geared Motor

RANGE

WORM GEARED MOTOR



	Output torque M_2 [Nm]		Ratio	
	Min	Max	Min	Max
NMRV 030	13	19		80
NMRV 040	29	48	5	100
NMRV 050	55	88		
NMRV-P 063	118	160		
NMRV-P 075	180	247		
NMRV-P 090	270	432	7,5	
NMRV-P 110	430	725		
NMRV 130	740	1.050		
NMRV 150	1.000	1.550		

- Power up to 15 kW
- Ratios between 5 and 100
- Max Torque 1.550 Nm
- Admissible radial loads max 18.000 N

COMBINED WORM GEARED MOTOR



	Output torque M_2 [Nm]		Ratio	
	Min	Max	Min	Max
NMRV 030/040	43	73		5.000
NMRV 030/050	79	145		
NMRV 030/NMRV-P 063	150	271		
NMRV 040/050	120	145		
NMRV 040/NMRV-P 063	231	271		
NMRV 040/NMRV-P 075	352	444	100	
NMRV 040/NMRV-P 090	361	700		
NMRV 050/NMRV-P 110	648	1.265		
NMRV-P 063/110	1.100	1.265		
NMRV-P 063/NMRV-P 130	1.123	1.760		
NMRV-P 063/NMRV-P 150	1.971	2.670		

- Power up to 1,85 kW
- Ratios between 100 and 5.000
- Max Torque 2.670 Nm

ACCESSORIES



PROTECTION COVER



OUTPUT FLANGES



FA



FB



FC



FD



FE

	FA	FB	FC	FD	FE
NMRV 030	•	-	-	-	-
NMRV 040	•	•	•	•	-
NMRV 050	•	•	•	•	-
NMRV-P 063	•	•	•	•	•
NMRV-P 075	•	•	-	-	-
NMRV-P 090	•	•	•	•	-
NMRV-P 110	•	•	-	-	-
NMRV 130	•	-	-	-	-
NMRV 150	•	-	-	-	-

• Available
- Not Available

SOLID OUTPUT SHAFT



Single output shaft



Double output shaft

TORQUE ARM



TORQUE LIMITER



Available versions NMRL 050 and NMRL-P 063-075-090

OTHER ACCESSORIES


- Viton oil seals
- Low/high temperature and food grade oil
- Filling/Drain/Breather/Level plug
- Reinforced Output

NMRV Worm geared motor with HA31 pre-stage



- HA31 is the new single stage helical gear reducer available as pre-stage for the worm gear boxes NMRV040 and NMRV050; it can be supplied as a separate unit to be mounted on any type of fitted geared motor
- Die-cast aluminium alloy casing; gears hardened and tempered with shaved profile steel 20MnCr5 (UNI7846)
- Available as unpainted or painted with RAL 5010 blue epoxy-polyester powder
- Power up to 1,1 kW and motor sizes up to 080
- Combined total ratios between 22,08 and 315
- Max Torque of group HA31+worm gear reducer 206 Nm

NMRV-P Worm geared motor with HW pre-stage

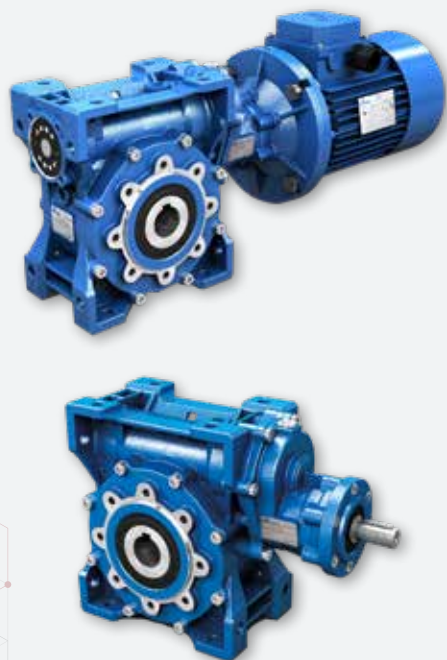

- The pre-stage units called HW are two: HW030 which can be mounted on gearboxes NMRVpower063-075 and HW040 which can be fitted with gearboxes NMRVpower 090-110
- The pre-stage construction is modular and therefore it can be supplied for various motor (PAM) with B5 and B14 flange
- Casing in aluminium alloy. Steel gears 20MnCr5 (UNI7846), hardened, tempered and carefully scraped
- Power up to 1,85 kW and motor sizes up to 090
- Combined total ratios between 22,08 and 1.083,33
- Max Torque of group HW+worm gear reducer 1.189 Nm

SALES NETWORK



SUBSIDIARIES



DEALERS



EUROPE



NORTH AMERICA



ASIA



OCEANIA



SOUTH AMERICA



AFRICA

